


Features and Benefits

- **Small Size and Lightweight**
- **Near Ideal Performance**
 - Low insertion loss
 - Good phase and amplitude balance
- **Precision**
 - Low part-to-part variation

Applications

- EW
- Radar
- SIGINT

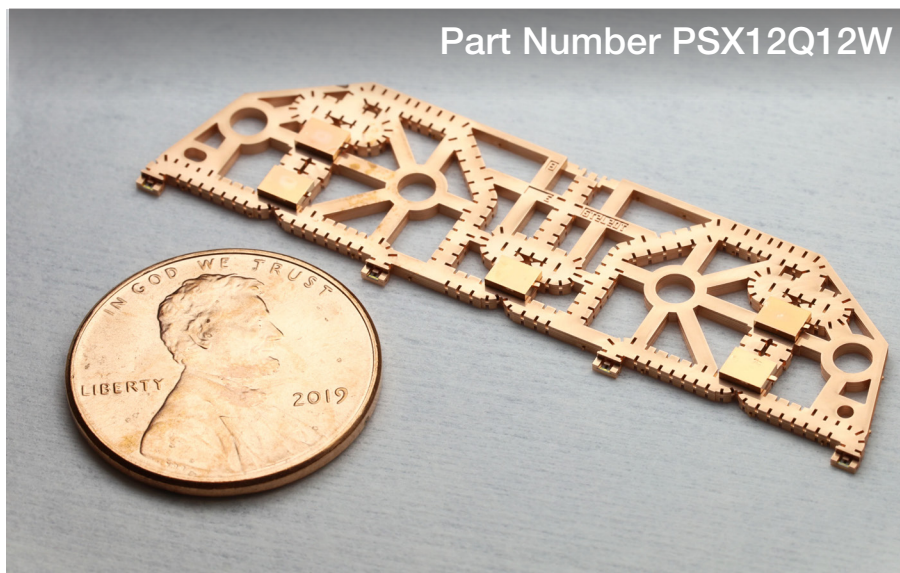

6-18 GHz 4-Way Combiner


High performance 4-way power combiner for 6-18 GHz applications.

Description

Nuvotronics PolyStrata® Technology provides low loss combining in a small form factor. This 4-way combiner covers 6-18 GHz with 0.4 dB insertion loss. It has four wirebond inputs and a coax output. Excellent amplitude and phase balance will result in best system level performance.

Typical Electrical Performance

Parameter	Frequency Range (GHz)	Min	Typ	Max
Insertion Loss (dB)	6 - 18	-	0.4	0.5
Return Loss (dB)		12	15	-
Isolation (dB)		13	18	-
Phase Balance (deg)		-	+/- 0.2	+/- 1.0
Amplitude Balance (dB)		-	+/- 0.1	+/- 0.2

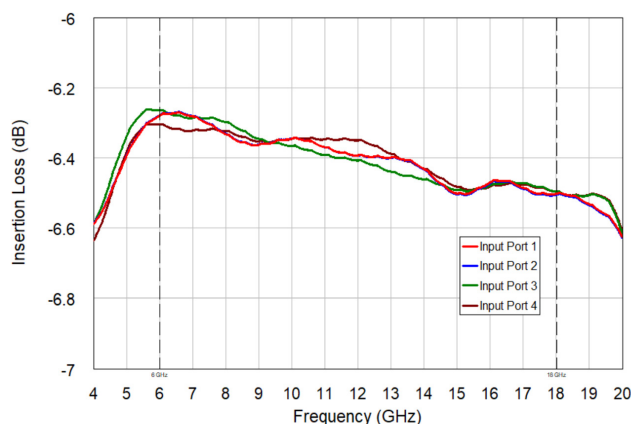





Additional Details

Special Handling / Storage Instructions	
Storage	IAW IPC-4553A
ESD Sensitivity	None
Ordering Information	PSX12Q12W
Alternative Packaging Available	Waffle Pack
Component Termination Finish	Immersion Silver, Immersion Gold
Export Certifications	TBA

Absolute Maximum Ratings



Power	Minimum 80W CW (Combined Output)*
Operating Temp	-55°C to 85°C
Solder Reflow	260°C max. for 10 seconds, 3 cycles
Epoxy Attach	150°C max. for 90 minutes

*Power handling will vary depending on balance between the amplifiers and supports one amplifier failing.

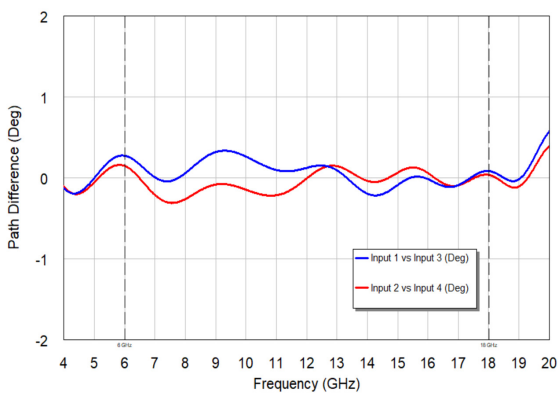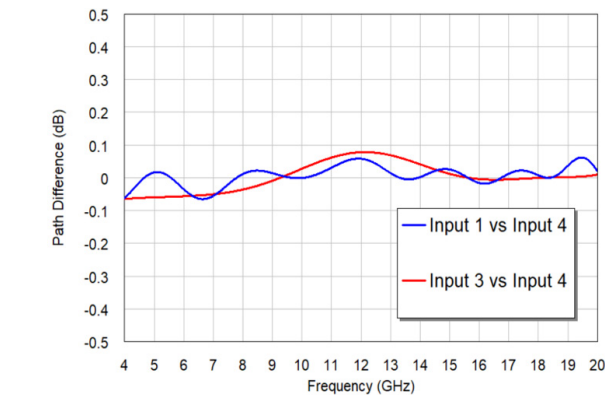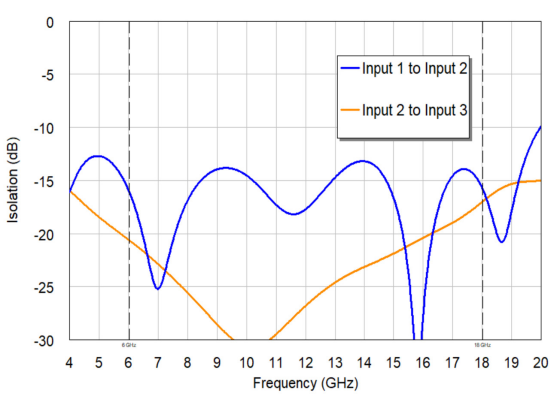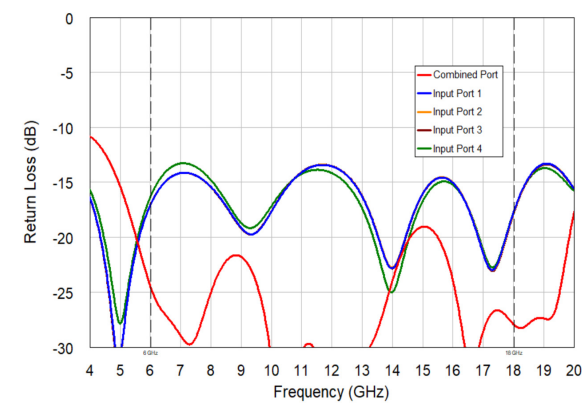

Simplified Block Diagram

Component View

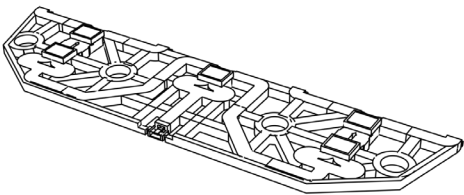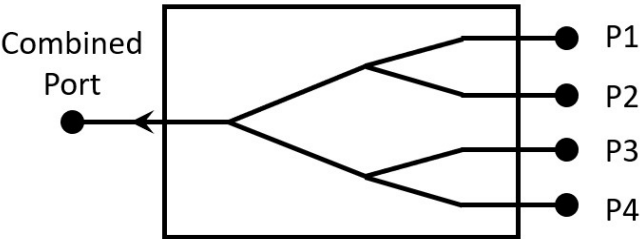

Mechanical Drawing

Mechanical Drawing

